

# DUAL HIGH CAPACITY HOSE REELS DP SERIES

**COXREELS® DP Series “Dual Product Delivery”** spring driven hose reels have two swivel inlets and two outlets for dual hose applications. Like the SP Series they are built to handle large hose diameters used in applications demanding large volume delivery in low and medium pressures. The sturdy box-style frame has heavy duty steel cross supports to all four corners for extra strength and rigidity.

## LOW PRESSURE

Two swivel joint inlets and two outlet risers to simultaneously handle equal lengths of two hoses. Hoses can be different diameters, in which case the larger hose diameter determines capacity of the reel. For applications 300 psi and temperatures to 250° F. **NOTE: Do not exceed listed hose O.D. to obtain maximum length.**

MODEL	HOSE						LESS HOSE		SIZE INDEX
	I.D.	O.D.	FT.	PSI	INLET/OUTLET N.P.T.	APRX. LBS.	MODEL	APRX. LBS.	
Please consult factory for reels with hose	3/8"	3/4"	50	300	1/2"	-	<b>DLPL-350</b>	94	<b>1</b>
	3/8"	3/4"	75	300	1/2"	-	<b>DLPL-375</b>	115	<b>1</b>
	3/8"	3/4"	100	300	1/2"	-	<b>DLPL-3100</b>	117	<b>2</b>
	1/2"	7/8"	50	300	1/2"	-	<b>DLPL-450</b>	97	<b>1</b>
	1/2"	7/8"	75	300	1/2"	-	<b>DLPL-475</b>	104	<b>2</b>
	1/2"	7/8"	100	300	1/2"	-	<b>DLPL-4100</b>	138	<b>3</b>
	3/4"	1 1/4"	25	300	3/4"	-	<b>DLPL-525</b>	93	<b>4</b>
3/4"	1 1/4"	50	300	3/4"	-	<b>DLPL-550</b>	100	<b>5</b>	

## MEDIUM PRESSURE


Two swivel joint inlets and two outlet risers to simultaneously handle equal lengths of two hoses. Hoses can be different diameters, in which case the larger hose diameter determines capacity of the reel. For applications 3000 psi and temperatures to 250° F. For higher temperatures and pressures, see price sheet or consult factory. **NOTE: Do not exceed listed hose O.D. to obtain maximum length.**

MODEL	HOSE						LESS HOSE		SIZE INDEX
	I.D.	O.D.	FT.	PSI	INLET/OUTLET N.P.T.	APRX. LBS.	MODEL	APRX. LBS.	
Please consult factory for reels with hose	3/8"	13/16"	50	3000	1/2"	-	<b>DMPL-350</b>	99	<b>1</b>
	3/8"	13/16"	75	3000	1/2"	-	<b>DMPL-375</b>	128	<b>1</b>
	3/8"	13/16"	100	3000	1/2"	-	<b>DMPL-3100</b>	120	<b>2</b>
	1/2"	15/16"	50	3000	1/2"	-	<b>DMPL-450</b>	102	<b>1</b>
	1/2"	15/16"	75	3000	1/2"	-	<b>DMPL-475</b>	115	<b>2</b>
	1/2"	15/16"	100	3000	1/2"	-	<b>DMPL-4100</b>	138	<b>3</b>

## REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	Ø	Dw
<b>1</b>	21 1/2"	20 1/2"	22 7/8"	15 3/8"	21 1/2"	10 1/2"	7 1/2"
<b>2</b>	21 1/2"	24 1/2"	26 3/8"	15 3/8"	25"	10 1/2"	7 1/2"
<b>3</b>	21 1/2"	28 1/2"	30 3/8"	15 3/8"	29"	10 1/2"	7 1/2"
<b>4</b>	23 7/8"	20 1/2"	22 7/8"	15 3/8"	21 1/2"	10 1/2"	7 1/2"
<b>5</b>	23 7/8"	24 1/2"	26 3/8"	15 3/8"	25"	10 1/2"	7 1/2"

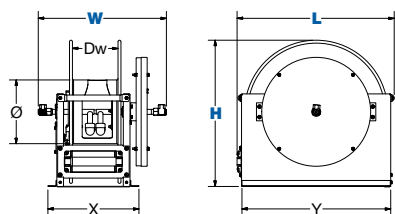


## COXREELS® ACCESSORY



### Top Rewind 4-Way Roller Bracket for SP & DP Series FOR CEILING, WALL OR FLOOR MOUNT APPLICATIONS

4-way enclosed pinch-proof stainless steel rollers are 1" in diameter supported by powder coated steel brackets. Specify ceiling mount & specify drum width. Weight: 10 lbs.

For 3/8" - 3/4" - **20458 & 8100** For 1" - 1 1/2" - **20458 & 8101**

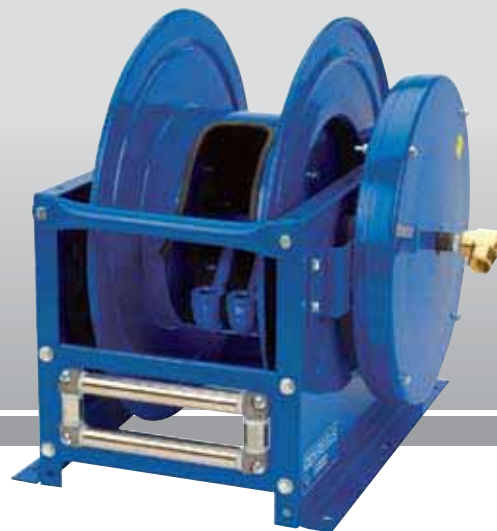

## DP SERIES :: REEL SPECIFICATIONS

### SWIVEL

- Two external fluid paths with machined from solid brass 90° full-flow NPT swivel inlets
- Swivel Seals: NITRILE

### DESIGN & STRUCTURE

- Sturdy box-style frame design with two inlets & two outlets to handle dual hose applications
- Low profile outlet riser & open drum slot design for even hose wrap
- Reel adjusts to wall, floor, vehicle & overhead positions with optional roller bracket
- Heavy gauge 1/4" steel base for maximum strength
- Reinforced steel frame provides maximum strength & stability
- Long lasting self-lubricated flange bearings for smooth rotation
- Heavy duty 1" stainless steel pinch-proof rollers

### RETRACTION

- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel pawl spring
- Cast iron lock ring with non-sparking bronze pawl
- Multi-position lock ratchet mechanism secures hose at desired length

### SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

### POSSIBLE FIELDS OF APPLICATION

- Hydraulics
- Hydrant Dispenser
- Twin Agent Applications
- Chemical Fluid Transfer

### ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories

