Industrial
MAINTENANCE REPAIR OPERATIONS

PROFESSIONAL GRADE FEATURES

100% PURE COXREELS QUALITY

ADJUSTABLE SOLID RUBBER HOSE STOP *for lead length positioning*

VERSATILE GUIDE ARM *adjusts to wall, floor, ceiling & vehicle mounting*

EXTERNAL FLUID PATH WITH MACHINED FROM SOLID BRASS 90° FULL-FLOW NPT SWIVEL *that screws directly on 1" solid steel axle, for simple seal maintenance and fast and easy hose installation - Viewable on other side*

HIGH QUALITY STEEL CONSTRUCTION *with our durable CPC™ powder coat finish*

HEAVY DUTY SPUN DISCS *with rolled edges for greater strength, made with first of it's kind CNC robotic spin cell*

ENCLOSED FACTORY TUNED AND MATCHED CARTRIDGE-STYLE SPRING MOTOR, *easily removed for safe & convenient replacement - Viewable on other side*

HEAVY GAUGE 1/4" STEEL BASE & SUPPORT POST *for maximum stability*

DUAL AXLE SUPPORT WITH SUPER HUB™ *increased reel strength for more demanding applications*
- Available on SH and T Series only

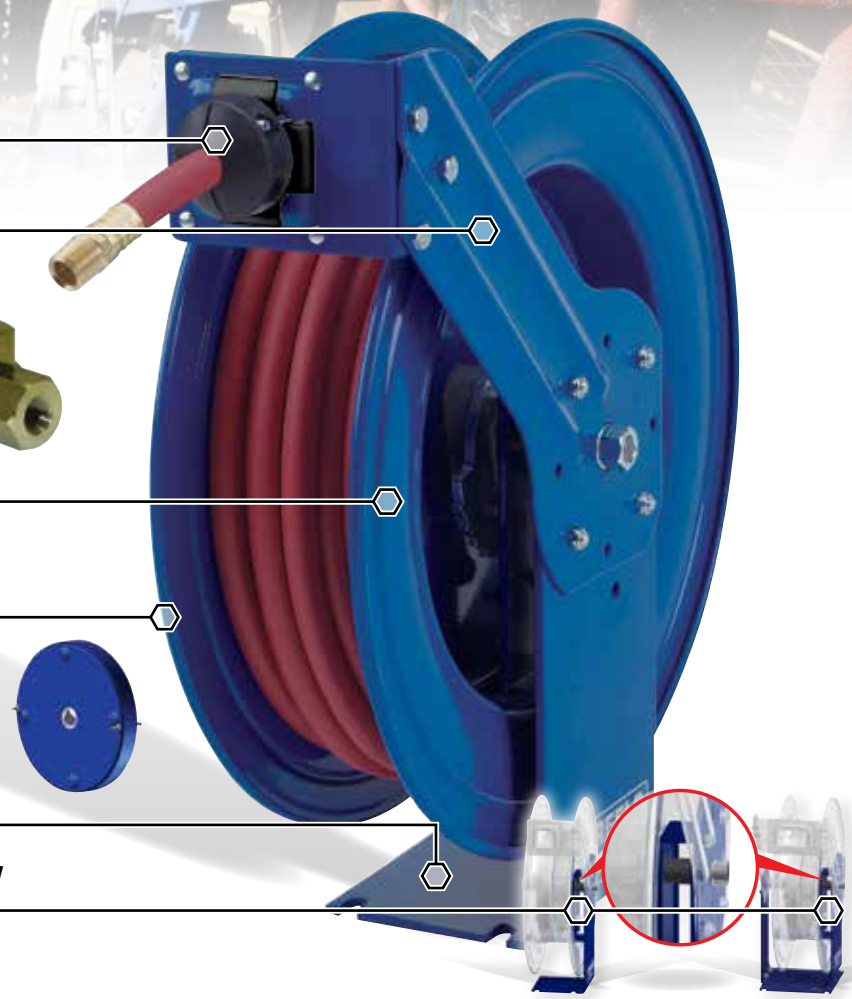

POSSIBLE FIELDS OF APPLICATION

- Maintenance, Repair & Operations
- General Industrial
- Manufacturing Plants & Facilities
- Air / Water Services
- Power Tools
- Light Source
- Washdown

COXREELS®

Industrial MRO

P SERIES

- External fluid path with machined from solid brass 90º full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel with space saving design facilitates workplace organization
- Available in Medium & High Pressure

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-LP-125	EZ-P-LP-125	¼"	25	300	27	5⅞ x 14⅞ x 13½"
P-LP-150	EZ-P-LP-150	¼"	50	300	40	6¾ x 18⅝ x 17⅛"
P-LP-325	EZ-P-LP-325	⅜"	25	300	28	6½ x 14⅞ x 13½"
P-LP-350	EZ-P-LP-350	⅜"	50	300	43	6¾ x 18⅝ x 17⅛"
P-LP-425	-	½"	25	300	44	7 x 18⅝ x 17⅛"
P-LP-450	EZ-P-LP-450	½"	50	300	48	7 x 18⅝ x 17⅛"

SH, MP & HP SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with machined from solid brass 90º full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel features Coxreels' exclusive Super Hub™ dual axle support system

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
SH-N-350	EZ-SH-350	⅜"	50	300	50	8¼ x 21¼ x 19½"
SH-N-375	EZ-SH-375	⅜"	75	300	68	8¼ x 21¼ x 24"
SH-N-450	EZ-SH-450	½"	50	300	54	8¼ x 21¼ x 19½"
SH-N-475	EZ-TSH-475	½"	75	300	68	8¾ x 25½ x 24"
MP-N-350	EZ-MP-350	⅜"	50	3,000	65	8¼ x 21¼ x 19½"
MP-N-450	EZ-MP-450	½"	50	2,500	67	8¾ x 25½ x 19½"
HP-N-150	EZ-HP-150	¼"	50	5,000	64	8¾ x 25½ x 19½"
HP-N-350	EZ-HP-350	⅜"	50	4,000	65	9¼ x 25½ x 19½"

1125 SERIES

- External fluid path with machined from solid brass 90º full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE (AFLAS on 1" models)
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	FT.	PSI	APRX. LBS.	W x H x L
1125-5-100	Electric Motor Options Available	¾"	100	3,000	42	26¾ x 18¾ x 17⅝"
1125-5-175		¾"	175	3,000	50	32¾ x 18¾ x 17⅝"
1125-5-200		¾"	200	3,000	55	38¾ x 18¾ x 17⅝"
1125-5-250		¾"	250	3,000	59	42¾ x 18¾ x 17⅝"
1125-6-50		1"	50	3,000	55	42¾ x 18¾ x 17⅝"
1125-6-100		1"	100	3,000	69	32 x 18½ x 17⅝"

C SERIES - AIR / WATER & AIR/ELECTRIC - DUAL PURPOSE HOSE REELS

- Two compact reel assemblies for dual applications. Each reel operates independently and mounts in one compact footprint.

AIR / WATER

- Two external fluid path with machined from solid brass 90º full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE

AIR/ELECTRIC

- External fluid path with machined from solid brass 90º full-flow NPT swivel inlet
- Choice of electrical accessory

MODEL	I.D.	FT.	ACCESSORY	AWG / NO. COND.	AMPS	PSI	APRX. LBS.	W x H x L
C-LP-325-325	⅜"	25	-	-	-	300	67	11½ x 18⅝ x 17"
C-LP-335-335	⅜"	35	-	-	-	300	69	11½ x 18⅝ x 17"
C-LP-350-350	⅜"	50	-	-	-	300	78	11½ x 18⅝ x 17"
C-LP-425-425	½"	25	-	-	-	300	70	11½ x 18⅝ x 17"
C-L350-5016-A	-	50	Single Industrial Receptacle	16/ 3	13	300	94	16 x 18⅝ x 17"
C-L350-5012-B	-	50	Quad Receptacle	12 / 3	20	300	97	16 x 18⅝ x 17"
C-L350-5016-C	-	50	Fluorescent Tube	16 / 3	0.3	300	94	16 x 18⅝ x 17"
C-L350-5016-D	-	50	Fluorescent Angle	16 / 3	13	300	94	16 x 18⅝ x 17"
C-L350-5016-E	-	50	Incandescent Light	16 / 3	13	300	94	16 x 18⅝ x 17"
C-L350-5012-F	-	50	Duplex G.F.C.I	12 / 3	13	300	94	16 x 18⅝ x 17"

PC SERIES

- External heavy gauge CPC™ powder coated steel component cover for simple slip ring routine maintenance
- Single pedestal cord reel with space saving design facilitates workplace organization
- Choice of electrical accessory



MODEL	EZ-Coil® Safety Line	ACCESSORY	AWG / NO. COND.	CORD FT.	AMPS	APRX. LBS.	W x H x L
PC13-5012-A	EZ-PC13-5012-A	Single receptacle	12 / 3	50	20	40	8½ x 14⅞ x 13½"
PC13-5012-B	EZ-PC13-5012-B	Quad receptacle	12 / 3	50	20	41	8½ x 14⅞ x 13½"
PC13-5016-C	EZ-PC13-5016-C	Fluorescent tube	16 / 3	50	0.3	37	8½ x 14⅞ x 13½"
PC13-5016-D	EZ-PC13-5016-D	Fluorescent angle light	16 / 3	50	13	37	8½ x 14⅞ x 13½"

P-W & SHW SERIES

- External fluid path with 90º full-flow dual ported brass swivel offering both connections from the same side of the reel
- Single pedestal reel with space saving design facilitates workplace organization
- Available in "T" Grade welding hose

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-W-125	EZ-P-W-125	¼"	25	200	46	8½ x 18⅝ x 17"
SHW-N-150	EZ-SHW-150	¼"	50	200	64	10¼ x 21¼ x 19½"
SHW-N-1100	EZ-SHW-1100	¼"	100	200	84	10¼ x 25½ x 19½"

P-WC SERIES

- External, easily accesible heavy gauge CPC™ powder coated steel components cover for simple slip ring routine maintenance
- Single pedestal reel with space saving design facilitates work-place organization

MODEL	FT.	TYPE	VOLT.	AMPS.	APRX. LBS.	W x H x L
P-WC17-5002	50	2 GA	600	225	56	11 x 14½ x 13¾"
P-WC17-5001	50	1 GA	600	300	60	11 x 14½ x 13¾"
P-WC17-5020	50	2/0	600	450	68	11 x 14½ x 13¾"
P-WC17-5010	50	1/0	600	350	64	11 x 14½ x 13¾"

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.

mdi - Manufacturers Distributor, Inc Phone: (727) 835-0673 | Fax: (813) 571 – 0422 www.CoxreelSales.com | Sales@CoxreelSales.com