

Power TRANSMISSION

PROFESSIONAL GRADE FEATURES



ADJUSTABLE SOLID RUBBER HOSE STOP for lead length positioning

VERSATILE GUIDE ARM adjusts to wall, floor, ceiling & vehicle mounting

EXTERNAL FLUID PATH WITH DUAL PORT MELANIZED 90° FULL-FLOW NPT SWIVEL that screws directly on 1" solid steel axle, for simple seal maintenance and fast and easy hose installation


HIGH QUALITY STEEL CONSTRUCTION with our durable CPC™ powder coat finish

HEAVY DUTY SPUN DISCS WITH ROLLED EDGES - not stamped, for greater strength, made with first of its kind CNC robotic spinning cell

ENCLOSED FACTORY TUNED AND MATCHED CARTRIDGE-STYLE SPRING MOTOR, easily removed for safe & convenient replacement

HEAVY GAUGE 1/4" STAINLESS STEEL BASE & SUPPORT POST for maximum stability

DUAL AXLE SUPPORT WITH SUPER HUB™ increased reel strength for more demanding applications

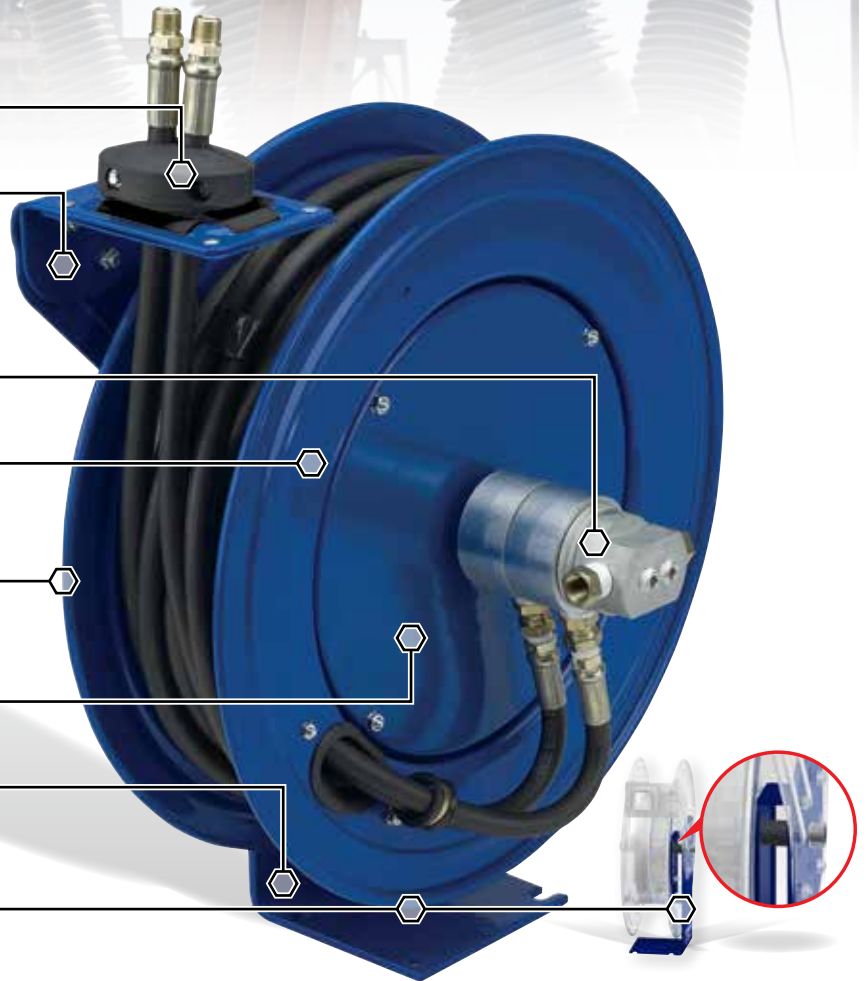

POSSIBLE FIELDS OF APPLICATION

- Maintenance / Repair & Operations
- General Industrial
- Pneumatic Tools
- Power Tools
- Light Sources
- Hydraulics
- Lubrication
- Washdown



Power Transmission



P SERIES



- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel with space saving design facilitates workplace organization
- Available in Medium & High Pressure

| MODEL | EZ-Coil® Safety Line | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|----------|----------------------|------|-----|-----|------------|--------------------------|
| P-LP-125 | EZ-P-LP-125 | 1/4" | 25 | 300 | 27 | 5 7/8 x 14 7/8 x 13 1/2" |
| P-LP-150 | EZ-P-LP-150 | 1/4" | 50 | 300 | 40 | 6 3/4 x 18 5/8 x 17 1/8" |
| P-LP-325 | EZ-P-LP-325 | 3/8" | 25 | 300 | 28 | 6 1/2 x 14 7/8 x 13 1/2" |
| P-LP-350 | EZ-P-LP-350 | 3/8" | 50 | 300 | 43 | 6 3/4 x 18 5/8 x 17 1/8" |
| P-LP-425 | - | 1/2" | 25 | 300 | 44 | 7 x 18 5/8 x 17 1/8" |
| P-LP-450 | EZ-P-LP-450 | 1/2" | 50 | 300 | 48 | 7 x 18 5/8 x 17 1/8" |

SH, MP & HP SERIES - EQUIPPED WITH SUPER HUB™



- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel features Coxreels' exclusive Super Hub™ dual axle support system



| MODEL | EZ-Coil® Safety Line | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|----------|----------------------|------|-----|-------|------------|--------------------------|
| SH-N-350 | EZ-SH-350 | 3/8" | 50 | 300 | 50 | 8 1/4 x 21 1/4 x 19 1/2" |
| SH-N-375 | EZ-SH-375 | 3/8" | 75 | 300 | 68 | 8 1/4 x 21 1/4 x 24" |
| SH-N-450 | EZ-SH-450 | 1/2" | 50 | 300 | 54 | 8 1/4 x 21 1/4 x 19 1/2" |
| SH-N-475 | EZ-SH-475 | 1/2" | 75 | 300 | 68 | 8 3/4 x 25 1/2 x 24" |
| MP-N-350 | EZ-MP-350 | 3/8" | 50 | 3,000 | 65 | 8 1/4 x 21 1/4 x 19 1/2" |
| MP-N-450 | EZ-MP-450 | 1/2" | 50 | 2,500 | 67 | 8 3/4 x 25 1/2 x 19 1/2" |
| HP-N-150 | EZ-HP-150 | 1/4" | 50 | 5,000 | 64 | 8 3/4 x 25 1/2 x 19 1/2" |
| HP-N-350 | EZ-HP-350 | 3/8" | 50 | 4,000 | 65 | 9 1/4 x 25 1/2 x 19 1/2" |

T SERIES - EQUIPPED WITH SUPER HUB™



- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system



| MODEL | EZ-Coil® Safety Line | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|------------|----------------------|------|-----|-------|------------|--------------------------|
| TSH-N-350 | EZ-TSH-350 | 3/8" | 50 | 300 | 61 | 9 3/8 x 21 1/4 x 19 1/2" |
| TSH-N-375 | EZ-TSH-375 | 3/8" | 75 | 300 | 82 | 9 3/8 x 25 1/2 x 24" |
| TSH-N-3100 | EZ-TSH-3100 | 3/8" | 100 | 300 | 85 | 9 3/8 x 25 1/2 x 24" |
| TSH-N-450 | EZ-TSH-450 | 1/2" | 50 | 300 | 63 | 9 3/8 x 21 1/4 x 19 1/2" |
| TSH-N-475 | EZ-TSH-475 | 1/2" | 75 | 300 | 82 | 9 3/8 x 25 1/2 x 24" |
| TSH-N-4100 | EZ-TSH-4100 | 1/2" | 100 | 300 | 95 | 9 3/8 x 25 1/2 x 24" |
| TMP-N-350 | EZ-TMP-350 | 3/8" | 50 | 3,000 | 74 | 9 3/8 x 21 1/4 x 19 1/2" |
| TMP-N-450 | EZ-TMP-450 | 1/2" | 50 | 2,500 | 77 | 9 3/8 x 21 1/4 x 19 1/2" |
| THP-N-150 | EZ-THP-150 | 1/4" | 50 | 5,000 | 74 | 9 3/8 x 21 1/4 x 19 1/2" |
| THP-N-350 | EZ-THP-350 | 3/8" | 50 | 4,000 | 78 | 9 3/8 x 21 1/4 x 19 1/2" |

MPD & TDMP SERIES



- External fluid path with dual port melanized 90° full-flow NPT swivel inlet
- Swivel Seals: TEFLON
- One-sided supply/return hookup

| MODEL | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|------------|------|-----|-------|------------|---------------------------|
| MPD-N-330 | 3/8" | 30 | 3,000 | 78 | 11 1/2 x 21 1/8 x 19 1/2" |
| MPD-N-430 | 1/2" | 30 | 2,500 | 79 | 11 1/2 x 21 1/8 x 19 1/2" |
| TDMP-N-350 | 3/8" | 50 | 3,000 | 104 | 11 5/8 x 18 5/8 x 17 5/8" |
| TDMP-N-450 | 1/2" | 50 | 2,500 | 106 | 11 5/8 x 18 5/8 x 17 5/8" |

1275HP SERIES



- Designed for dual hydraulic emergency rescue systems & other high pressure hydraulic tools
- External fluid path with dual port melanized 90° full-flow NPT swivel inlet
- Swivel Seals: VITON®

| MODEL | INLET | OUTLET | 1/4 CAPACITY | 1/2 CAPACITY | PSI | APRX. LBS. | W x H x L |
|----------------|-------|--------|--------------|--------------|--------|------------|-----------------------|
| 1275HPL-4-8 | 1/4" | 1/2" | 135' | 85' | 10,000 | 37 | 18 3/8 x 18 1/8 x 17" |
| 1275HPL-4-8-E | 1/4" | 1/2" | 135' | 85' | 10,000 | 68 | 22 3/8 x 18 1/8 x 17" |
| 1275HPL-4-12-E | 1/4" | 1/2" | 200' | 125' | 10,000 | 70 | 26 3/8 x 18 1/8 x 17" |

PC SERIES



- External heavy gauge CPC™ powder coated steel component cover for simple slip ring routine maintenance
- Single pedestal cord reel with space saving design facilitates workplace organization
- Choice of electrical accessory



| MODEL | EZ-Coil® Safety Line | ACCESSORY | AWG / NO. COND. | CORD FT. | AMPS | APRX. LBS. | W x H x L |
|-------------|----------------------|-------------------------|-----------------|----------|------|------------|--------------------------|
| PC13-5012-A | EZ-PC13-5012-A | Single receptacle | 12 / 3 | 50 | 20 | 40 | 8 1/2 x 14 7/8 x 13 1/2" |
| PC13-5016-A | EZ-PC13-5016-A | Single receptacle | 16 / 3 | 50 | 13 | 36 | 8 1/2 x 14 7/8 x 13 1/2" |
| PC13-5012-B | EZ-PC13-5012-B | Quad receptacle | 12 / 3 | 50 | 20 | 41 | 8 1/2 x 14 7/8 x 13 1/2" |
| PC13-5016-C | EZ-PC13-5016-C | Fluorescent tube | 16 / 3 | 50 | 0.3 | 37 | 8 1/2 x 14 7/8 x 13 1/2" |
| PC13-5016-D | EZ-PC13-5016-D | Fluorescent angle light | 16 / 3 | 50 | 13 | 37 | 8 1/2 x 14 7/8 x 13 1/2" |
| PC13-5016-E | EZ-PC13-5016-E | Incandescent cage light | 16 / 3 | 50 | 13 | 36 | 8 1/2 x 14 7/8 x 13 1/2" |
| PC13-5012-F | EZ-PC13-5012-F | G.F.C.I. receptacle | 16 / 3 | 50 | 13 | 38 | 8 1/2 x 14 7/8 x 13 1/2" |

P-W & SHW SERIES



- External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel
- Single pedestal reel with space saving design facilitates workplace organization
- Designed for Oxy-Acetylene or "T" grade welding hose

| MODEL | EZ-Coil® Safety Line | I.D. | FT. | PSI | APRX. LBS. | W x H x L |
|-------------|----------------------|------|-----|-----|------------|---------------------------|
| P-W-125 | EZ-P-W-125 | 1/4" | 25 | 200 | 46 | 8 1/2 x 18 5/8 x 17" |
| SHW-N-150 | EZ-SHW-150 | 1/4" | 50 | 200 | 64 | 10 1/4 x 21 1/4 x 19 1/2" |
| SHW-N-1100 | EZ-SHW-1100 | 1/4" | 100 | 200 | 84 | 10 1/4 x 25 1/2 x 24" |
| P-WT-125 | EZ-P-WT-125 | 1/4" | 25 | 200 | 46 | 8 1/2 x 18 5/8 x 17" |
| SHWT-N-150 | EZ-SHWT-150 | 1/4" | 50 | 200 | 64 | 10 1/4 x 21 1/4 x 19 1/2" |
| SHWT-N-1100 | EZ-SHWT-1100 | 1/4" | 100 | 200 | 84 | 10 1/4 x 25 1/2 x 24" |

P-WC SERIES



- External, easily accessible heavy gauge CPC™ powder coated steel components cover for simple slip ring routine maintenance
- Electrical current runs through a 450 AMP rated slip ring
- Designed for electrode & grounding lead applications (Each lead requires an individual reel)

| MODEL | FT. | TYPE | VOLT | AMPS. | APRX. LBS. | W x H x L |
|-------------|-----|------|------|-------|------------|-----------------------|
| P-WC17-5002 | 50 | 2ga | 600 | 225 | 56 | 11 x 18 1/4 x 17 1/4" |
| P-WC17-5001 | 50 | 1ga | 600 | 300 | 60 | 11 x 18 1/4 x 17 1/4" |
| P-WC17-5020 | 50 | 2/0 | 600 | 450 | 68 | 11 x 18 1/4 x 17 1/4" |
| P-WC17-5010 | 50 | 1/0 | 600 | 350 | 64 | 11 x 18 1/4 x 17 1/4" |

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.