

# Pressure WASHING

## PROFESSIONAL GRADE FEATURES



**HEAVY DUTY SOLID SPUN DISCS WITH ROLLED EDGES** - not stamped, made with first of its kind CNC robotic spinning cell

**LOW PROFILE RISER & OPEN DRUM SLOT** for smooth, even hose wraps

**ZINC PLATED PLUMBING** for applications requiring superior oxidation prevention  
Only on 1/2" 1125 Series


**INDUSTRIAL GRADE BRASS**, machined from solid, full flow swivel with external fluid path for ease of seal maintenance

**PERMANENTLY SEALED PILLOW BLOCK BEARINGS** for smooth rotation

**ONE PIECE ALL CNC ROBOTICALLY WELDED** steel "A" frame construction

### MOTORIZED VERSIONS:

The electric version features all of the same features found on the hand crank model plus **SOLID STEEL HALO** is welded to the disc for a direct gear driven motor

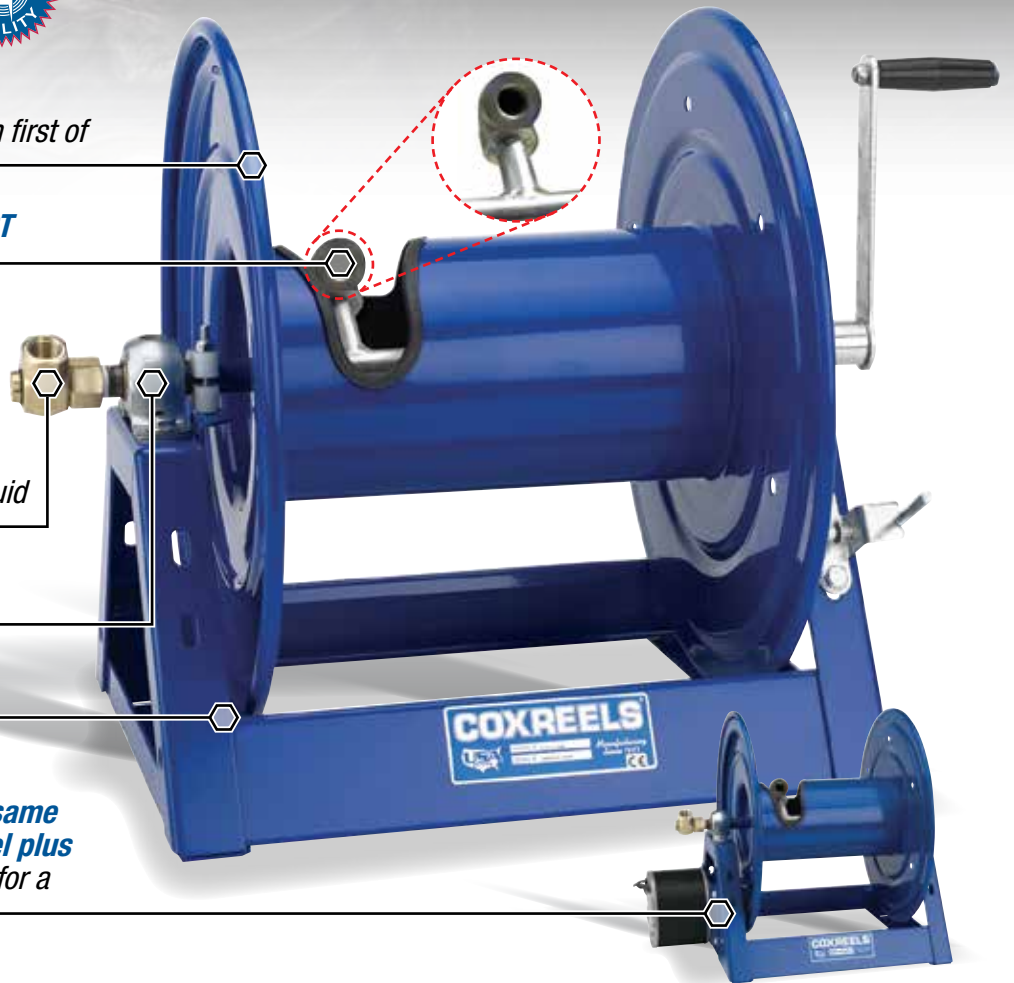

### POSSIBLE FIELDS OF APPLICATION

- Pressure Washing
- Ground Maintenance
- Industrial Cleaning
- High Pressure Spraying
- Power Wash
- Water Jetting
- Water Blasting
- Steam Cleaning



# Pressure Washing



## 1125 SERIES



- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE
- Exclusive low profile outlet riser (Zinc plated on 1/2" models) & open drum slot design for flat smooth hose wrap
- All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	FT.	PSI	APRX. LBS.	W x H x L
1125-4-100	Electric Motor Options Available	1/2"	100	3,000	36	19 1/2 x 18 3/4 x 17 5/8"
1125-4-200		1/2"	200	3,000	39	25 1/2 x 18 3/4 x 17 5/8"
1125-4-325		1/2"	325	3,000	48	31 1/2 x 18 3/4 x 17 5/8"
1125-4-500		1/2"	500	3,000	58	41 1/2 x 18 3/4 x 17 5/8"
1125-5-100		3/4"	100	3,000	42	26 3/4 x 18 3/4 x 17 5/8"
1125-5-175		3/4"	175	3,000	50	32 3/4 x 18 3/4 x 17 5/8"
1125-5-200		3/4"	200	3,000	55	38 3/4 x 18 3/4 x 17 5/8"
1125-5-250		3/4"	250	3,000	59	42 3/4 x 18 3/4 x 17 5/8"

## HP 1125 SERIES



- External fluid path with electroless nickel plated steel 90° full-flow NPT swivel inlet
- Swivel Seals: AFLAS
- Exclusive low profile outlet riser (Zinc plated on 1/2" models) & open drum slot design for flat smooth hose wrap
- All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	FT.	HP PSI	APRX. LBS.	W x H x L
HP1125-4-100	Electric Motor Options Available	1/2"	100	5,000	36	19 1/2 x 18 3/4 x 17 5/8"
HP1125-4-200		1/2"	200	5,000	39	25 1/2 x 18 3/4 x 17 5/8"
HP1125-4-325		1/2"	325	5,000	48	31 1/2 x 18 3/4 x 17 5/8"
HP1125-4-500		1/2"	500	5,000	58	41 1/2 x 18 3/4 x 17 5/8"
HP1125-5-100		3/4"	100	5,000	42	26 3/4 x 18 3/4 x 17 5/8"
HP1125-5-175		3/4"	175	5,000	50	32 3/4 x 18 3/4 x 17 5/8"
HP1125-5-200		3/4"	200	5,000	55	38 3/4 x 18 3/4 x 17 5/8"
HP1125-5-250		3/4"	250	5,000	59	42 3/4 x 18 3/4 x 17 5/8"

### CHOICE OF MOTORS



## 100 SERIES



- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Solid one piece, heavy gauge steel "U" shaped frame
- Open drum design for no hassle hose wrap

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L
112-3-50	3/8"	50	4,000	15	14 1/2 x 13 x 12"
112-3-100	3/8"	100	4,000	19	18 1/4 x 13 x 12"
112-3-150	3/8"	150	4,000	21	22 3/4 x 13 x 12"
117-3-250	3/8"	250	4,000	30	18 1/4 x 18 x 17"
117-3-400	3/8"	400	4,000	33	22 3/4 x 18 x 17"
112-4-75	1/2"	75	4,000	21	22 3/4 x 13 x 12"
117-4-225	1/2"	225	4,000	31	22 3/4 x 18 x 17"
117-4-350	1/2"	350	4,000	37	28 1/4 x 18 x 17"

## CM & DM SERIES



- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- CM: Caddy Mount Hand Crank Hose Reel
- DM: Dolly Mount Hand Crank Hose Reel

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L
112-3-100-CM	3/8"	100	4,000	18	18 1/2 x 14 3/4 x 13 1/8"
112-3-150-CM	3/8"	150	4,000	22	23 x 14 3/4 x 13 1/8"
117-4-225-CM	1/2"	225	4,000	28	23 x 18 1/2 x 18"
117-3-200-DM	3/8"	200	4,000	37	19 x 36 1/4 x 21"
117-4-225-DM	1/2"	225	4,000	39	23 1/2 x 36 1/4 x 21"

## SM SERIES AND OPTIONAL MOUNTING BRACKET



- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: VITON®
- Forward-weighted design ensures rotation in direction of use

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L	
SM12-3-100	3/8"	100	4,000	15	19 x 13 1/2 x 12"	
SM17-3-250	3/8"	250	4,000	26	19 x 18 1/2 x 17"	
SM17-4-125	1/2"	125	4,000	26	19 x 18 1/2 x 17"	
SMK-02	SM Series Mounting Bracket				8	-

## P SERIES



- External fluid path with Zinc plated steel full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel with space saving design facilitates workplace organization

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-HP-125	EZ-P-HP-125	1/4"	25	5,000	48	7 x 18 5/8 x 17 1/8"
P-HP-325	EZ-P-HP-325	1/4"	50	4,000	49	7 x 18 5/8 x 17 1/8"

## HP SERIES - EQUIPPED WITH SUPER HUB™



- External fluid path with Zinc plated steel full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel features Coxreels' exclusive Super Hub™ dual axle support system

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
HP-N-150	EZ-HP-150	1/4"	50	5,000	64	8 3/4 x 25 1/2 x 19 1/2"
HP-N-350	EZ-HP-350	3/8"	50	4,000	65	9 1/4 x 25 1/2 x 19 1/2"

## T SERIES - EQUIPPED WITH SUPER HUB™



- External fluid path with Zinc plated steel full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
THP-N-150	EZ-THP150	1/4"	50	5,000	74	9 3/8 x 21 1/4 x 19 1/2"
THP-N-1100	EZ-THP-1100	1/4"	100	5,000	104	9 3/8 x 25 1/2 x 24"
THP-N-350	EZ-THP-350	3/8"	50	4,000	78	9 3/8 x 21 1/4 x 19 1/2"
THP-N-375	EZ-THP-375	3/8"	75	4,000	98	9 3/8 x 25 1/2 x 24"

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.