

# Transportation

## PROFESSIONAL GRADE FEATURES



**HEAVY DUTY SOLID SPUN DISCS WITH ROLLED EDGES** - not stamped, made with first of its kind CNC robotic spinning cell

**LOW PROFILE RISER & OPEN DRUM SLOT** for smooth, even hose wraps

**EXTERNAL FLUID PATH WITH IN-LINE ALUMINIUM SWIVELS**, machined from lightweight aluminium and configured in-line fluid path with full flow design


- Viewable on opposite side

**LONG-HANDLED LOCKING PIN** to secure reel from rotation during transport or storage

**HIGH QUALITY STEEL CONSTRUCTION** with our durable CPC™ powder coated finish

**ONE PIECE ALL CNC ROBOTICALLY WELDED steel "A" frame construction**

**THE ELECTRIC VERSION FEATURES RELIABLE CHAIN / SPROCKET** rewind system with **YOUR CHOICE OF MOTOR**

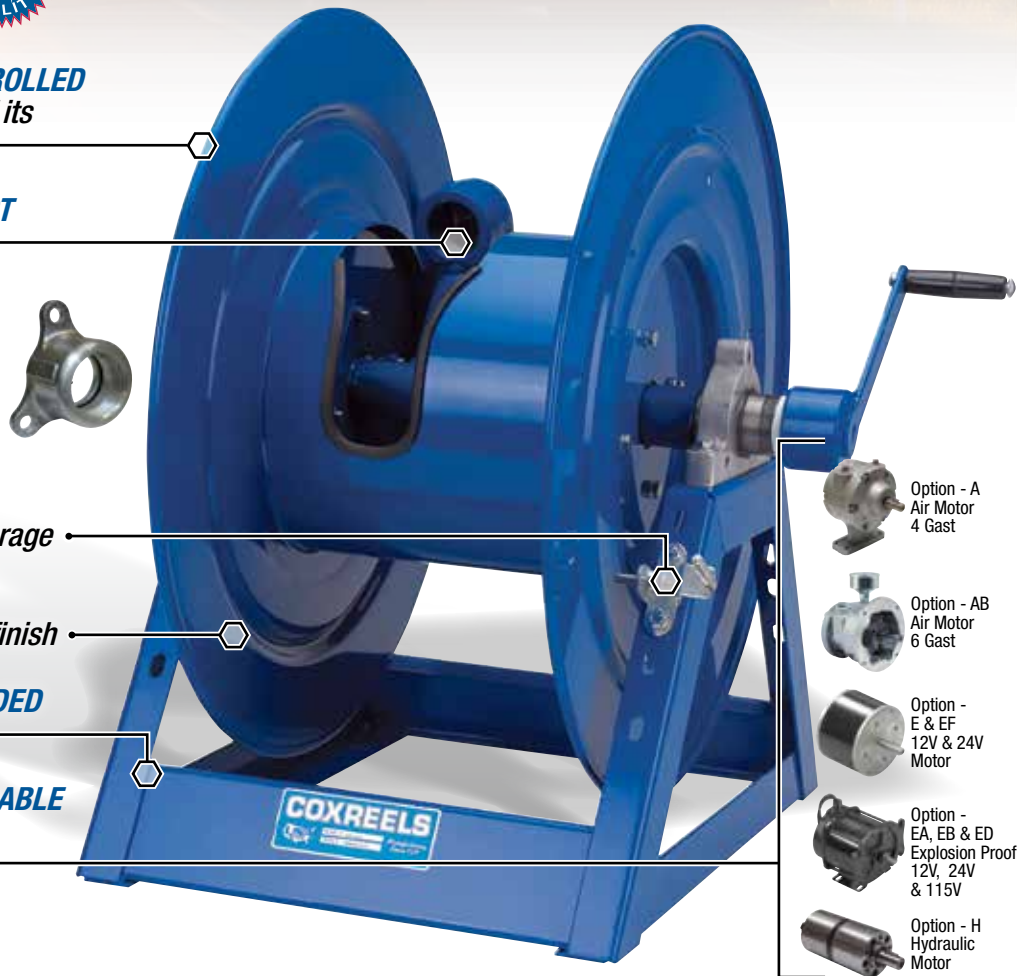

Option - A  
Air Motor  
4 Gast

Option - AB  
Air Motor  
6 Gast

Option - E & EF  
12V & 24V  
Motor

Option - EA, EB & ED  
Explosion Proof  
12V, 24V & 115V

Option - H  
Hydraulic  
Motor

### POSSIBLE FIELDS OF APPLICATION

- Air/Water/Antifreeze System
- Lubricant Dispensing
- Fuel Dispensing
- DEF Dispensing
- Washdown
- High Volume Delivery
- Bulk Liquid Handling
- Chemical Fluid Transfer
- Service Bays





## T SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system
- Built for rugged mobile applications
- Multi-position lock ratchet mechanism secures hose at desired length



MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
<b>TSH-N-350</b>	<b>EZ-TSH-350</b>	3/8"	50	300	61	9 3/8 x 21 1/4 x 19 1/2"
<b>TSH-N-375</b>	<b>EZ-TSH-375</b>	3/8"	75	300	82	9 3/8 x 25 1/2 x 24"
<b>TSH-N-3100</b>	<b>EZ-TSH-3100</b>	3/8"	100	300	85	9 3/8 x 25 1/2 x 24"
<b>TSH-N-450</b>	<b>EZ-TSH-450</b>	1/2"	50	300	63	9 3/8 x 21 1/4 x 19 1/2"
<b>TSH-N-475</b>	<b>EZ-TSH-475</b>	1/2"	75	300	82	9 3/8 x 25 1/2 x 24"
<b>TSH-N-4100</b>	<b>EZ-TSH-4100</b>	1/2"	100	300	95	9 3/8 x 25 1/2 x 24"
<b>TMP-N-350</b>	<b>EZ-TMP-350</b>	3/8"	50	3,000	74	9 3/8 x 21 1/4 x 19 1/2"
<b>TMP-N-450</b>	<b>EZ-TMP-450</b>	1/2"	50	2,500	77	9 3/8 x 21 1/4 x 19 1/2"
<b>TMP-N-550</b>	<b>EZ-TMP-550</b>	3/4"	50	1,500	94	9 3/8 x 25 1/2 x 24"
<b>TMP-N-650</b>	-	1"	50	1,250	116	12 1/2 x 25 1/2 x 24"
<b>THP-N-150</b>	<b>EZ-THP-150</b>	1/4"	50	5,000	74	9 3/8 x 21 1/4 x 19 1/2"
<b>THP-N-350</b>	<b>EZ-THP-350</b>	3/8"	50	4,000	78	9 3/8 x 21 1/4 x 19 1/2"

## DEF SERIES & FUELING REELS

### FUEL SERIES

- Machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Fuel dispensing hose designed to convey non-aromatic fuels including diesel, kerosene, fuel oil & heating oil

### DEF SERIES

- Non-corrosive stainless steel 90° full-flow NPT swivel for Diesel Exhaust Fluid (DEF) dispensing applications
- Swivel Seals: VITON®
- DEF dispensing hose designed to convey the high-purity, aqueous urea solution DEF.

FUEL MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
<b>SHF-N-525</b>	<b>EZ-SHF-525</b>	3/4"	25	300	57	9 3/8 x 25 1/2 x 19 1/2"
<b>TSHF-N-550</b>	<b>EZ-TSHF-525</b>	3/4"	50	300	91	9 3/8 x 25 1/2 x 24"
<b>TSHF-N-635</b>	-	1"	35	300	95	10 x 25 1/2 x 24"
<b>TSHF-N-650</b>	-	1"	50	300	101	12 x 25 1/2 x 24"

DEF MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
<b>SH-N-525-DF-BBX</b>	<b>EZ-SH-N-525-DF-BBX</b>	3/4"	25	300	57	8 1/4 x 21 1/4 x 24"
<b>SH-N-550-DF-BBX</b>	<b>EZ-SH-N-550-DF-BBX</b>	3/4"	50	300	76	9 3/8 x 25 1/2 x 24"
<b>TSH-N-550-DF-BBX</b>	<b>EZ-TSH-N-550-DF-BBX</b>	3/4"	50	300	91	9 3/8 x 25 1/2 x 24"



## SD SERIES

- Available with 7 strand x 7 wire galvanized steel or stainless steel cable
- Compact static discharge cable reel available in spring rewind or direct hand crank retraction
- Non corrosive stainless steel spring, pawl & zinc plated ratchet
- Suffix models with -1 for stainless steel cable

MODEL	EZ-Coil® Safety Line	O.D.	FT.	PSI	APRX. LBS.	W x H x L
<b>SD-35</b>	<b>EZ-SD-35</b>	5/32"	35	18	18	3 7/8 x 11 1/2 x 11"
<b>SD-50</b>	<b>EZ-SD-50</b>	5/32"	50	20	20	3 7/8 x 11 1/2 x 11"
<b>SD-75</b>	<b>EZ-SD-75</b>	5/32"	75	31	31	4 x 15 x 14 1/2"
<b>SD-100</b>	<b>EZ-SD-100</b>	5/32"	100	32	32	4 x 15 x 14 1/2"
<b>SDH-100</b>	-	5/32"	100	24	24	5 3/4 x 11 1/2 x 11"
<b>SDH-200</b>	-	5/32"	200	28	28	5 3/4 x 11 1/2 x 11"



## 1125 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE (AFLAS on 1" models)
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap. All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	FT.	PSI	APRX. LBS.	W x H x L
<b>1125-4-100</b>	<b>Electric Motor Options Available</b>	1/2"	100	3,000	36	19 1/2 x 18 3/4 x 17 5/8"
<b>1125-4-200</b>		1/2"	200	3,000	39	25 1/2 x 18 3/4 x 17 5/8"
<b>1125-4-325</b>		1/2"	325	3,000	48	31 1/2 x 18 3/4 x 17 5/8"
<b>1125-5-100</b>		3/4"	100	3,000	42	26 3/4 x 18 3/4 x 17 5/8"
<b>1125-5-250</b>		3/4"	250	3,000	59	42 3/4 x 18 3/4 x 17 5/8"
<b>1125-6-100</b>		1"	100	3,000	69	44 1/2 x 18 1/2 x 17 5/8"



## 1175 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: AFLAS
- Exclusive low profile outlet riser, open drum slot design for flat smooth hose wrap. All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
<b>1175-6-50</b>	<b>Electric Motor Options Available</b>	1"	1 7/16"	50	3,000	67	24 1/8 x 26 1/8 x 24"
<b>1175-6-100</b>		1"	1 7/16"	100	3,000	70	28 1/8 x 26 1/8 x 24"
<b>1175-6-150</b>		1"	1 7/16"	150	3,000	75	32 1/8 x 26 1/8 x 24"
<b>1175-6-200</b>		1"	1 7/16"	200	3,000	83	36 5/8 x 26 1/8 x 24"



## 1185 SERIES

- External fluid path with in-line aluminium straight, full flow NPT swivel inlet
- Swivel Seals: NITRILE
- Exclusive low profile outlet riser, open drum slot design for flat smooth hose wrap. All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
<b>1185-1124</b>	<b>Electric Motor Options Available</b>	1 1/2"	2 1/16"	50	600	76	25 x 26 x 24"
<b>1185-1524</b>		1 1/2"	2 1/16"	75	600	81	29 x 26 x 24"
<b>1185-2024</b>		1 1/2"	2 1/16"	100	600	94	33 1/2 x 26 x 24"
<b>1185-2528</b>		1 1/2"	2 1/16"	150	600	122	38 1/2 x 30 x 28"



## 1195 SERIES

- External fluid path with in-line aluminium straight, full flow NPT swivel inlet
- Swivel Seals: VITON®
- Exclusive low profile outlet riser, open drum slot design for flat smooth hose wrap. All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
<b>1195-932</b>	<b>Electric Motor Options Available</b>	2"	2 9/16"	50	600	128	22 3/4 x 33 1/4 x 32"
<b>1195-1332</b>		2"	2 9/16"	75	600	148	26 3/4 x 33 1/4 x 32"
<b>1195-2032</b>		2"	2 9/16"	115	600	186	30 3/4 x 33 1/4 x 32"



This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.